


INJECTION POLYURETHANE WHEELS



POLYURETHANE WHEELS WITH PP CENTER

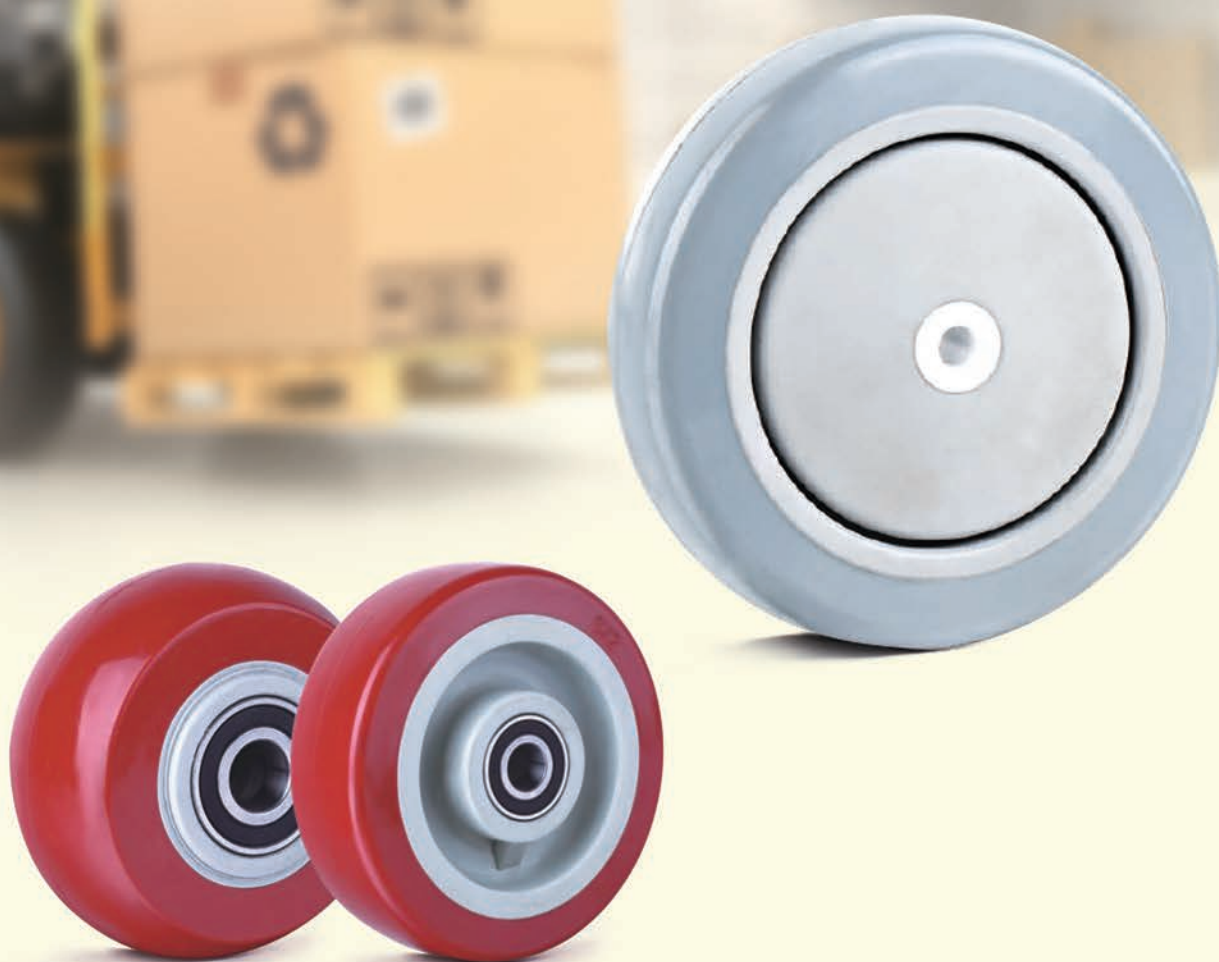

Tread: Polyurethane
 Centre: PP
 Color: As per request
 Hardness: 92 ± 3 shore A
 Diameter range: 100–125mm
 Load capacity: 150–250kgs

Firmly bonded
 Abrasion-resistant, low rolling resistance, corrosion resistance
 Bearing: Roller Bearing
 Temperature range: -30°C +80°C
 Working speed: 4km/h

SERIES PNTT

PNTT-100/28R	100	28	39	21.6	150
PNTT-100/35R	100	35	48	23.4	200
PNTT-125/35R	125	35	48	23.4	250

POLYURETHANE WHEELS WITH PP CENTER



Tread: Polyurethane
 Centre: PP
 Color: As per request
 Hardness: 92 ± 3 shore A
 Diameter range: 3–5inch
 Load capacity: 250–300lbs

Firmly bonded
 Abrasion-resistant, low rolling resistance, corrosion resistance
 Bearing: Ball Bearing
 Temperature range: -30°C +80°C
 Working speed: 4km/h

SERIES PPAJ






PPAJ-03/14P	3	1-1/4	1-9/16	9.7	250
PPAJ-04/14P	4	1-1/4	1-9/16	9.7	300
PPAJ-05/14P	5	1-1/4	1-9/16	9.7	300

POLYURETHANE WHEELS WITH PP CENTER

Tread: Polyurethane
Centre: PP
Color: As per request
Hardness: 92 ± 3 shore A
Diameter range: 4-8in
Load capacity: 700-950lbs

Firmly bonded
Abrasion-resistant, low rolling resistance, corrosion resistance
Bearing: Plain bearing
Temperature range: -30°C $+80^{\circ}\text{C}$
Working speed: 4km/h








SERIES PPVD					
PPVD-04/02R	4	2	'2-3/16	'1-3/16	700
PPVD-05/02R	5	2	'2-3/16	'1-3/16	750
PPVD-06/15R	6	1-1/2	1-5/8	'1-3/16	700
PPVD-06/02R	6	2	'2-3/16	'1-3/16	900
PPVD-08/02R	8	2	'2-3/16	'1-3/16	950

POLYURETHANE WHEELS WITH PP CENTER

Tread: Polyurethane
Centre: PP
Color: As per request
Hardness: 92 ± 3 shore A
Diameter range: 5-8in
Load capacity: 750-950lbs

Firmly bonded
Abrasion-resistant, low rolling resistance, corrosion resistance
Bearing: Ball Bearing
Temperature range: -30°C $+80^{\circ}\text{C}$
Working speed: 4km/h



SERIES PPVF					
PPVF-05/02B	5	2	'2-3/16	17	750
PPVF-06/02B	6	2	'2-3/16	17	900
PPVF-08/02B	8	2	'2-3/16	17	950